


# Active-108

2 Zones Activation Deactivation Through Key

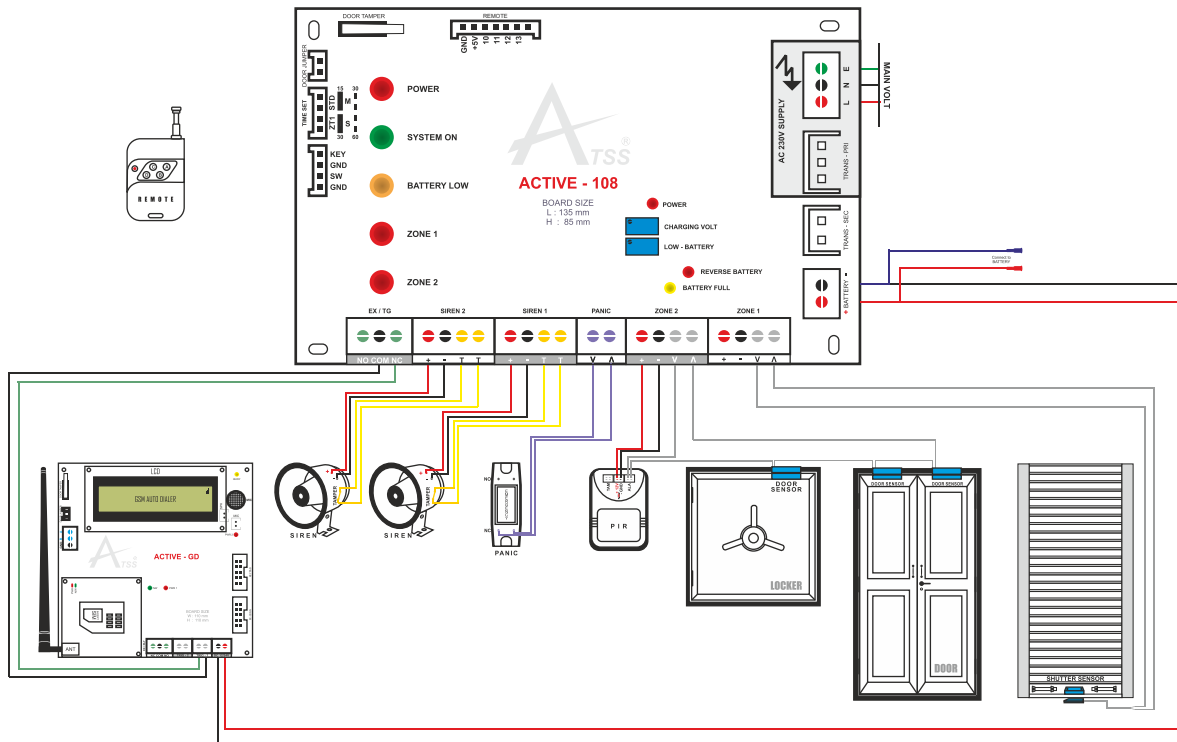

## SPECIFICATION

<b>POWER SUPPLY</b>	
Max Power Consumption	36 Watts
AC Main Supply	220-240 V AC /50 Hz
Transformer-Step down	230 V AC/50 Hz(Pri) 18 V AC /2 A (Sec)
<b>BATTERY</b>	
Battery type	Battery is fully recommended
Max Recharging Voltage-Input	13.7 V DC
Max Voltage/Current ratings	12 V DC/7 AH
<b>ZONES</b>	
Zone Response Time	< 500 Millisecond
Zone Loop Resistance	< 1kilo Ohm For Normally Closed
Max Output Voltage/Current for Sensor Supply	12 V/500 MA
Max Output Voltage/Current for Siren Supply	12 V/750 MA
Max Length of Sensor Cable (multi core cable)	150 m (Depends on cable resistance)
Max Length of Siren Cable (multi core cable)	75 m (Depends on cable resistance)
<b>RELAY-NORMALLY CLOSED</b>	
Max Output Voltage/Current	AC 240 V/ 5 A
<b>ENVIRONMENTAL</b>	
Environment	Residential/ Commercial/ Light Industrial
Max Humidity	95% Non-Condensing
Operating Temperature	0 °C To 45 °C
Storage Temperature	-20°C ~ + 60°C
<b>PHYSICAL</b>	
Colour	Grey Coloured Metal Box
Control Panel Dimensions(mm)	(H X W X L) = 240 X 90 X 240
Weight	2.9kg