


ACTIVE 306 - 4 Z

4 Zones with Keypad, LCD Display

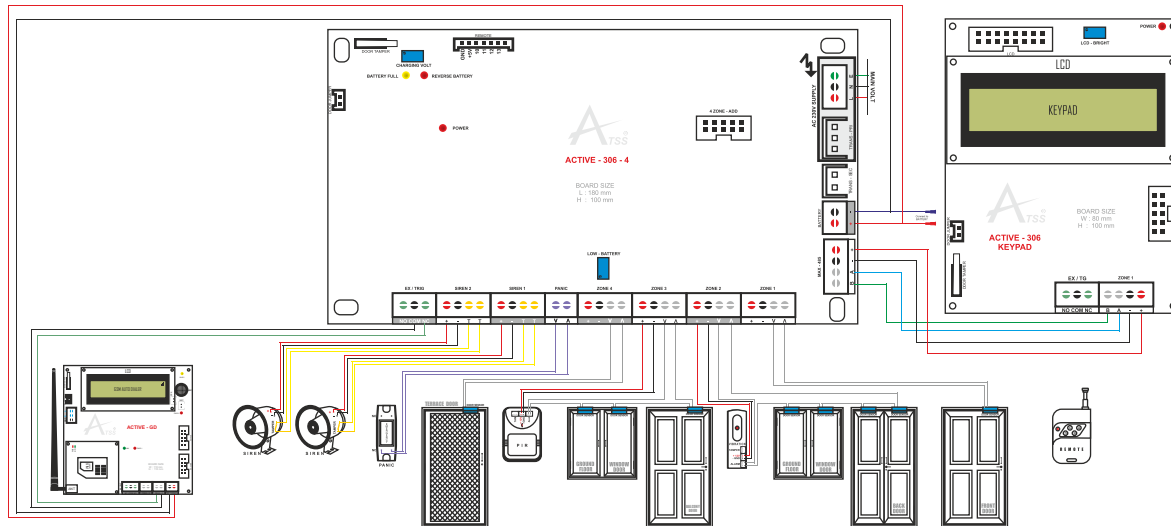

SPECIFICATION

POWER SUPPLY	
Max Power Consumption	36 Watts
AC Main Supply	220-240 V AC /50 Hz
Transformer-Step down	230 V AC/50 Hz(Pri) 18 V AC /2 A (Sec)
BATTERY	
Battery type	Battery is fully recommended Lead Acid Rechargeable Battery
Max Recharging Voltage-Input	13.7 V DC
Max Voltage/Current ratings	12 V DC/7 AH
ZONES	
Zone Response Time	< 500 Millisecond
Zone Loop Resistance	< 1kilo Ohm For Normally Closed
Max Output Voltage/Current for Sensor Supply	12 V/500 MA
Max Output Voltage/Current for Siren Supply	12 V/750 MA
Max Length of Sensor Cable (multi core cable)	150 m (Depends on cable resistance)
Max Length of Siren Cable (multi core cable)	75 m (Depends on cable resistance)
RELAY-NORMALLY CLOSED	
Max Output Voltage/Current Base panel Rly	240 V/5A
Maximum Output Voltage/Current- Keypad Rly	120 V/3A
ENVIRONMENTAL	
Environment	Residential/ Commercial/ Light Industrial
Max Humidity	95% Non-Condensing
Operating Temperature	0° C To 45° C
Storage Temperature	-20°C ~ + 60°C
PHYSICAL	
Colour	Grey Coloured Metal Box
Control Panel Dimensions(mm)	(H X W X L) = 230 X 90 X 290
Keypad Dimension (mm)	(HXWXL) 130 X 35 X 90
Weight-Panel/Keypad	3kg/450g