


SPECIFICATION

Active - GD

2 Trigger Controlled by Password/ SMS with 32 Bit LCD keypad

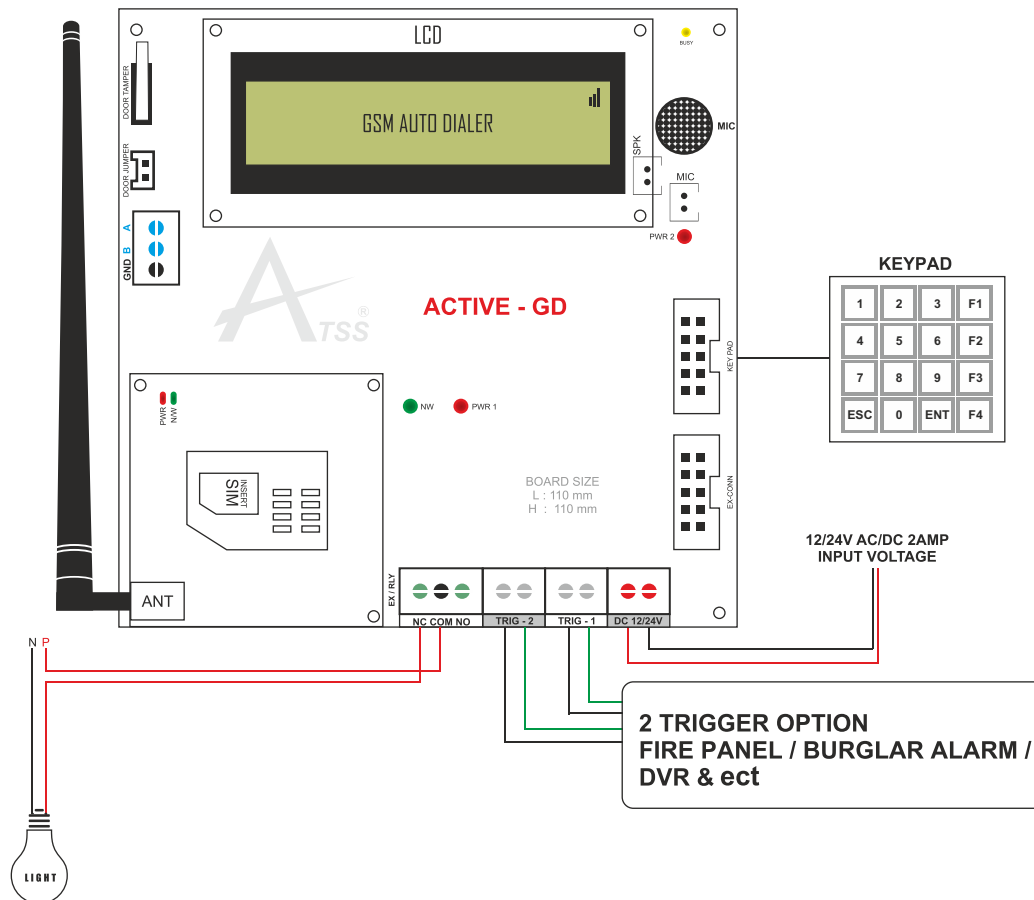

POWER SUPPLY

Maximum Power Consumption	24 Watts
DC /AC Main Supply	12-24 V / 2 amps

ZONES

Zone Response Time	< 500 Millisecond
Zone Loop Resistance	< 1 kilo Ohm For Normally Closed
Max Length of Sensor Cable (multi core cable)	150 m (Depends on cable resistance)
GSM Antenna	3 db required

RELAY-NORMALLY CLOSED

Max Voltage/ current ratings	AC 240 V/5 A
------------------------------	--------------

ENVIRONMENTAL

Environment	Residential/ Commercial/ Light Industrial
Max Humidity	95% Non-Condensing
Operating Temperature	0°C To 45°C
Storage Temperature	-20°C~+ 60°C

PHYSICAL

Colour	Grey Coloured Metal Box
Control Panel Dimensions(mm)	(H X W X L) = 150 X 45 X 130
Weight	570 g